

Wedge Levelling Products



Stone Spacer



Spacer



Wedge



Tool

Wedge Levelling System

Products

250 pcs	Stone spacer x 250pcs	WLS250ST
250 pcs	Wedge spacer x 250pcs	WLS250
500 pcs	Wedge spacer x 500pcs	WLS500
2000 pcs	Wedge spacer x 2000pcs	WLS2000
100 pcs	Wedge x 100pcs	WLW100
250 pcs	Wedge x 250pcs	WLW250
tool	Wedge levelling tool	WLFT
kit	Wedge levelling trolley kit	WLTK

Tiles often move during the drying process, so to avoid disappointment and costly repairs use the DTA Wedge Levelling System. Using the DTA Wedge Levelling System during the installation process will ensure you end up with a lippage free and level surface.



VIDEO DEMO
 1. To view the video, download any QR Code Reader App. on your smart phone.
 2. Scan the QR Code to watch video.



Wedge Levelling System




servicing retail, commercial & industrial markets for over 35 years.



Levelling Specifications


Spacer:

Suitable for tiles between
3mm and 12mm thick

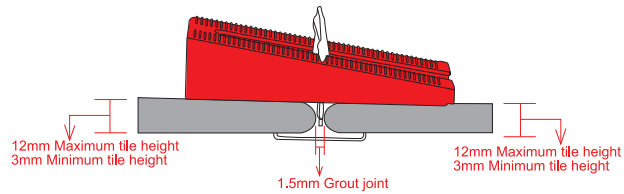

Stone Spacer:

Suitable for stone between
13mm and 25mm thick

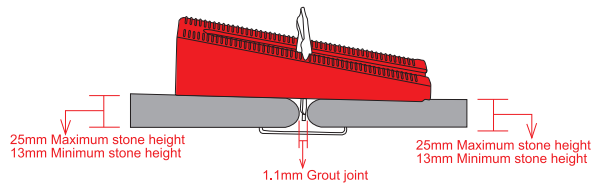

Levelling Coverage

Square Tiles

Square Tiles												
CM	10	20	30	40	50	60	70	80	90	100	110	120
10	44 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
20	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
30	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
40	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
50	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
60	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
70	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
80	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
90	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
100	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
110	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		
120	25 Pcs/M ₂			11 Pcs/M ₂			7 Pcs/M ₂			6 Pcs/M ₂		

Rectangle Tiles

Rectangle Tiles												
CM	10	20	30	40	50	60	70	80	90	100	110	120
10	50 Pcs/M ₂			22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂		
20	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
30	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
40	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
50	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
60	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
70	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
80	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		
90	22 Pcs/M ₂			9 Pcs/M ₂			6 Pcs/M ₂			6 Pcs/M ₂		

NB: More spacers may be used as required


Levelling Instructions




1 Place spacer between tiles, 100mm from both ends of the tile.



2 Once tile and spacer are in place, fasten the wedge.



3 Clamp the two pieces together with the levelling tool to tighten. This will level & hold the tiles in place while the tile adhesive sets.



4 Once tile adhesive has dried, simply kick the wedge along the grout joint to remove.* Grout to finish tiled area.

5 Remove wedge from spacer for re-use.

* Refer to adhesive manufacturer for drying time.

- Adjustable Tension
- Holds tiles level
- Ideal for walls and floors
- Eliminates lippage on uneven tiles



The Choice of Professionals

www.dtaigroup.com