



Spare Wheel
Spare wheel included.

Side Extensions
New design of the lateral supports ensures stability when cutting large format tiles.

Transport
Designed to be easily carried and transported.

	ART61600EV	ART61300EV	ART61000EV	ART6850EV	ART6601EV
CUTTING LENGTH	1630 mm	1330 mm	1030 mm	880 mm	630 mm
MAX SIZE TILE FOR DIAGONAL CUTS	1150x1150 mm	940x940 mm	720x720 mm	620x620 mm	440x440 mm
CUTTING THICKNESS	5 - 15 mm				
CUTTING WHEEL	Ø 15 x 6 x 1,5 mm				
PACKING DIMENSION	1996x285x265 mm	1696x285x265 mm	1396x285x265 mm	1246x285x265 mm	996x285x265 mm
NET WEIGHT	19,9 Kg	17,0 Kg	14,1 Kg	13,0 Kg	9,5 Kg



www.dtaigroup.com
The Choice of Professionals

ProfiEVO

PROFESSIONAL MANUAL TILE CUTTER



BATTIPAV™

MACHINES FOR BUILDING



Aluminium Magnetic Foot

Aluminium breaking foot with rubber to protect and avoid scratching the tile. By lifting the magnetic foot a whole incision can be done with a single move and a simple lift of the handle allows the breaking foot to separate the tile.



Carriage


The aluminium carriage is equipped with two ball-bearings, one on top and one on the bottom of the rail, to provide perfect sliding and top precision cuts.

Structure

Strong aluminium body creating a rigid yet lightweight machine.



PUSH CUTTING SYSTEM

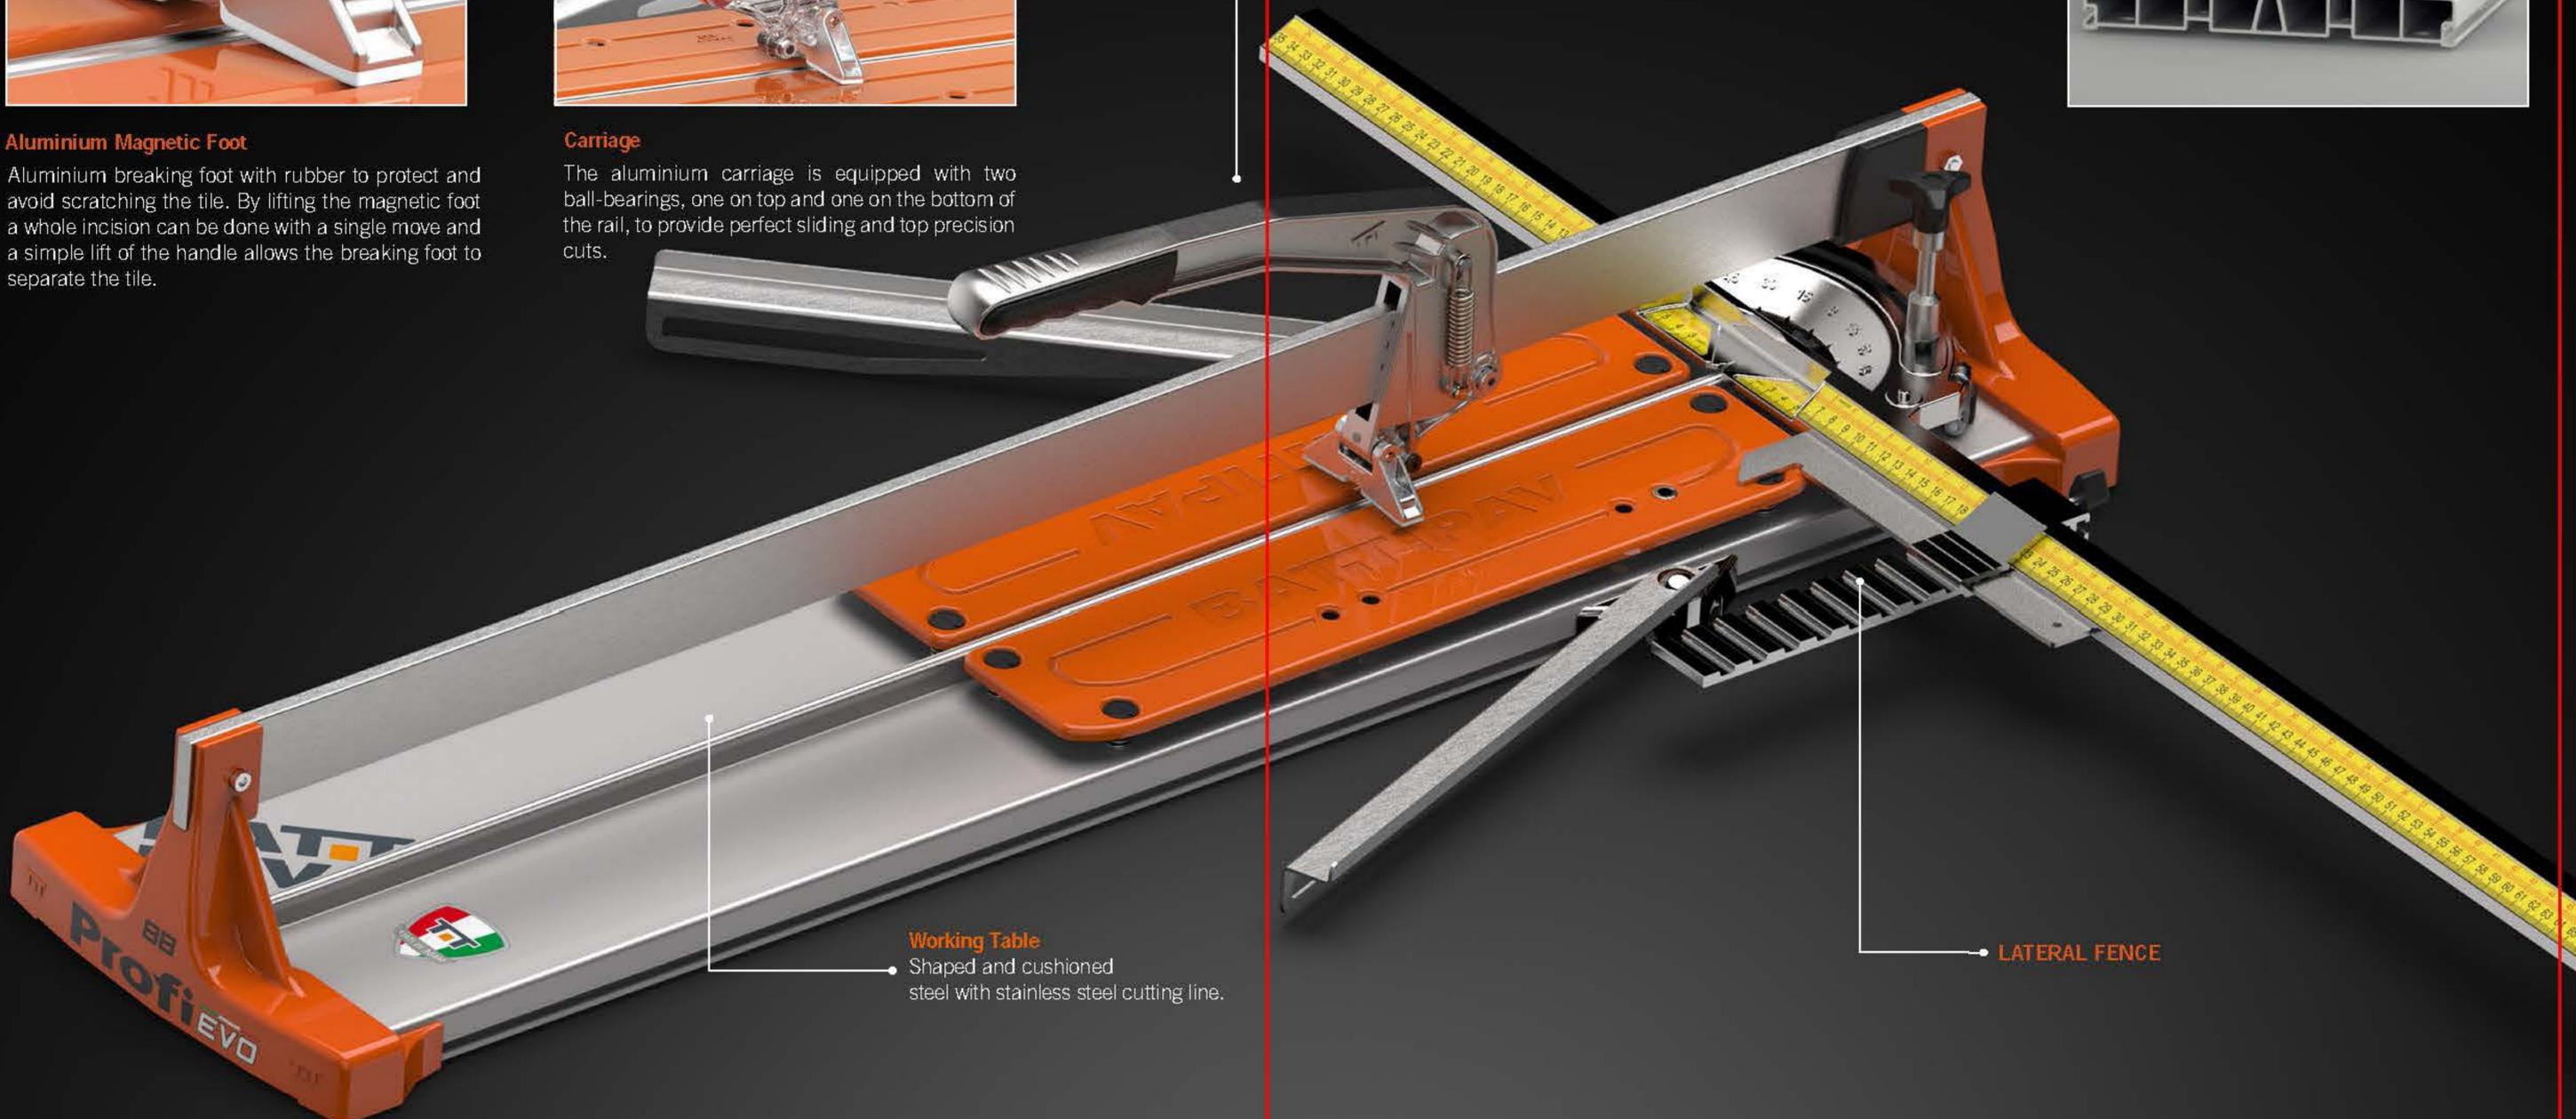

Working Table

Shaped and cushioned steel with stainless steel cutting line.

LATERAL FENCE



Goniometric Square

The goniometric square design with its lectern shape and rigid construction allows for direct reading of the measurements to be cut.



Quick Reading

The new designed goniometric square provides perfect reading of the measurements for straight cuts (black lower scale) and diagonal cuts (red upper scale).



Worktops

The specially designed springs guarantee a rapid separation of the cut tile and provides an excellent finish result.